


ALARM-SECURITY CABLE 22AWG, 2 CONDUCTOR STRANDED (7 STRAND) 1000' PULL BOX

PART NUMBER:

293-2152



PG. 1	<input type="checkbox"/> APPROVALS:	<input type="checkbox"/> DATE:	<p>THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO VERTICAL CABLE AND MAY NOT BE DISCLOSED OR TRANSMITTED TO ANY OTHER PARTIES WITHOUT THE EXPRESS WRITTEN PERMISSION OF VERTICAL CABLE. THIS INFORMATION IS PROVIDED FOR THE PURPOSES OF QUOTATION ONLY.</p> 
	MARKETING		
	TECHNICAL		
	SALES		
	FINAL		

GENERAL INFORMATION ABOUT THIS PRODUCT:

MANUFACTURER:

REFERENCE: 293-2152

DESCRIPTION:

Alarm-Security Cable, 22AWG, 2 Conductor Stranded (7 Strand), 1000', Pull Box, White

ACCESSORIES INCLUDED WITH THIS PRODUCT:

NONE

FEATURES AND BENEFITS:

- Ideal for Indoor Remote Control of Security, Intercom, and Sound Systems.
- Can also be used for Powering Limited-Control Circuits or Burglar Alarms
- PVC Outer Jacket
- Available in Coil Pack

APPLICATIONS:

- Door Controllers
- Prox Sensors
- Key Pads
- Sound Systems
- Access Control
- Smoke Detectors



PULL BOX



CABLE

PG.
2

P/N: 293-2152

PRODUCT: ALARM-SECURITY CABLE, 22AWG, 2 CONDUCTOR

AUTHOR:



DATE: 04/03/07

REV: 01

TECHNICAL INFORMATION ABOUT THIS PRODUCT:

MANUFACTURER:

REFERENCE: 293-2152

DESCRIPTION:

Alarm-Security Cable, 22AWG, 2 Conductor Stranded (7 Strand), 1000', Pull Box, White

TECHNICAL SPECS:

Rated Temperature (°C) 70
Rated Voltage (V) 30
Product Standard Certification

Conductor **Stranded BC**
Size 22 AWG
Diameter (±0.005mm) 7/0.254

Insulation **PVC**
Average Thickness (mm) 0.170
Min. Point Thickness (mm) 0.150
Outer Diameter (±0.05mm) 1.10

Assembly Diameter (±0.2mm) 2.20

Jacket **PVC**
Average Thickness (mm) 0.38
Min. Point Thickness (mm) 0.35
Outer Diameter (±0.10mm) 3.00
Rip Cord Yes
Color White

Color of Wire Insulation
1. Black
2. Red

Mechanical Characteristics
Test Object Jacket
Test Material PVC
Before Tensile Strength (Mpa) >=10
Aging Elongation (%) >=100
Aging Condition (°Cxhrs) 80x168
After Tensile Strength (Mpa) >=80% of unaged
Aging Elongation (%) >=75% of unaged

Marking
VERTICAL CABLE E312655 UL (UL) CMR/CL2R 75C 22AWG 2C STRANDED
ALARM/STATION WIRE CABLE (VID:C1) XXXFT
SEQUENTIAL FOOT MARKERS ON JACKET

**PG.
3**

P/N: 293-2152


PRODUCT: ALARM-SECURITY CABLE, 22AWG, 2 CONDUCTOR

AUTHOR:



DATE: 04/03/07

REV: 01

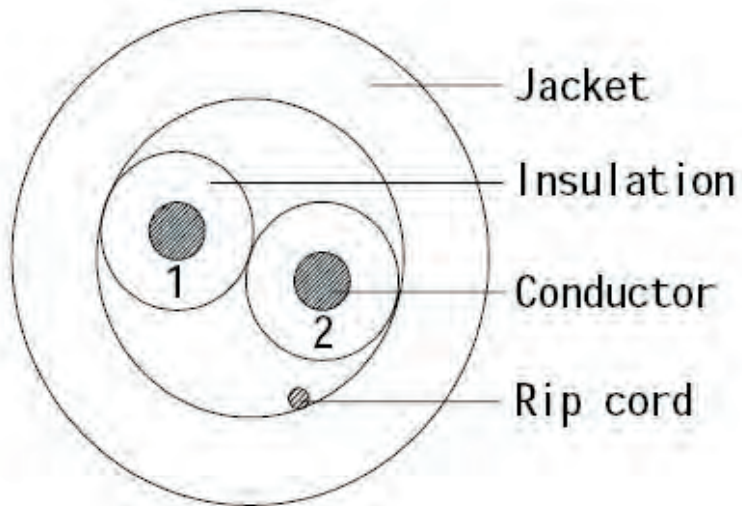

LABEL FOR PRODUCTION DATE CONTROL:

THIS UPC LABEL IS PLACED ON EACH 1 UNIT SHIPMENT CARTON.


LABEL: UPC CODE



IMPORTANT NOTE: --

UL FILE NUMBER:


ETL FILE NUMBER: --

PG. 4	<input type="checkbox"/> P/N: 293-2152	<input type="checkbox"/> PRODUCT: ALARM-SECURITY CABLE, 22AWG, 2 CONDUCTOR
	<input type="checkbox"/> AUTHOR:	
	<input type="checkbox"/> DATE: 04/03/07 <input type="checkbox"/> REV: 01	

PRODUCT PACKAGING DIMENSIONS:


PULL BOX PACKAGING :




PG. 5	<input type="checkbox"/> P/N: 293-2152	<input type="checkbox"/> PRODUCT: ALARM-SECURITY CABLE, 22AWG, 2 CONDUCTOR
	<input type="checkbox"/> AUTHOR:	
	<input type="checkbox"/> DATE: 04/03/07	

SHIPMENT CARTON:

SHIPMENT BOX DIMENSION:

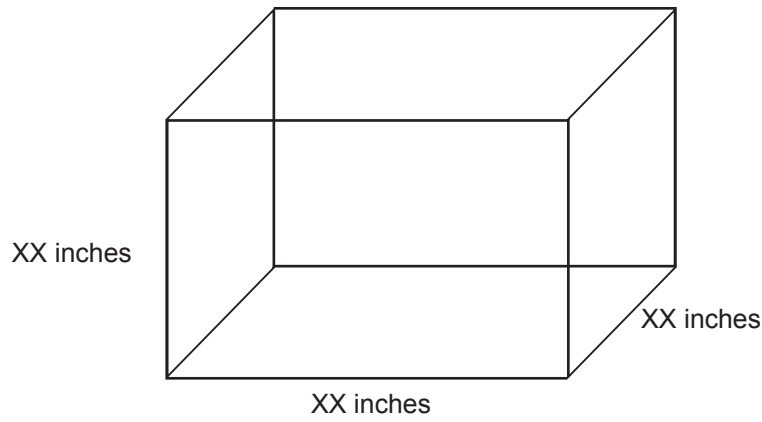

SHIPMENT CARTONS PLACED IN A PALLET (ONE PALLET FITS XX CARTONS):

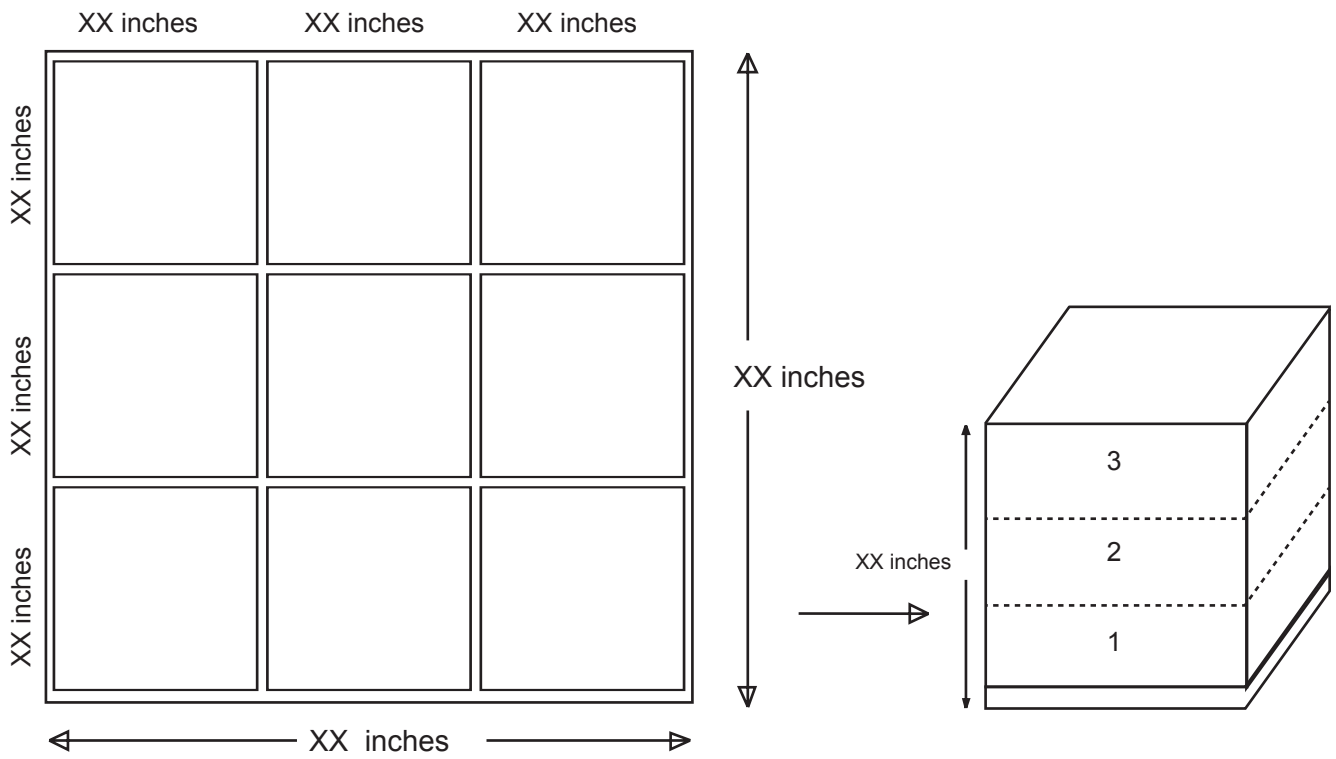

**PG.
6**

P/N: 293-2152

PRODUCT: ALARM-SECURITY CABLE, 22AWG, 2 CONDUCTOR

AUTHOR:

DATE: 04/03/07

REV: 01

