



**WINEGARD®**

# High Definition (HD) Platinum Antennas

INSTRUCTIONS

**FM MODEL HD6055P**

## 90 DAY LIMITED WARRANTY

The Winegard Company warrants this product against any defects in materials or workmanship within 90 (ninety) days from date of purchase. No warranty claim will be honored unless at the time the claim is made, you present proof of purchase to an authorized Winegard dealer (if unknown, please contact Winegard Company, 3000 Kirkwood St., Burlington, IA 52601-2000, 800-288-8094).

Winegard Company (at its option) will either repair or replace the defective product at no charge to you. This warranty covers parts, but does not cover any costs incurred in removal, shipping or reinstallation of the product. The warranty does not extend to products which have been subjected to misuse, improper installation, or damage caused by wind, lightning, ice or other occurrences over which the manufacturer has no control.

The 90 Day Warranty is provided on the condition that the equipment is properly delivered with all handling and freight charges prepaid to your Winegard dealer for repair or return to our factory at the above address. Winegard dealers will arrange for the replacement or repair and return to you, without charge, the product which failed due to defective material or workmanship.

WINEGARD COMPANY WILL NOT ASSUME ANY LIABILITIES FOR ANY OTHER WARRANTIES, EXPRESS OR IMPLIED, MADE BY ANY OTHER PERSON.


ALL OTHER WARRANTIES WHETHER EXPRESS, IMPLIED, OR STATUTORY INCLUDING WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTABILITY ARE LIMITED TO THE 90-DAY PERIOD OF THIS WARRANTY.

The foregoing shall be the sole and exclusive remedy of any person, whether in contract, tort or otherwise, and Winegard shall not be liable for incidental or consequential damage or commercial loss, or from any other loss or damage except as set forth above.

Some states do not allow limitations on how long an implied warranty lasts, or the exclusion of limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you.

This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

Rev. 2/08

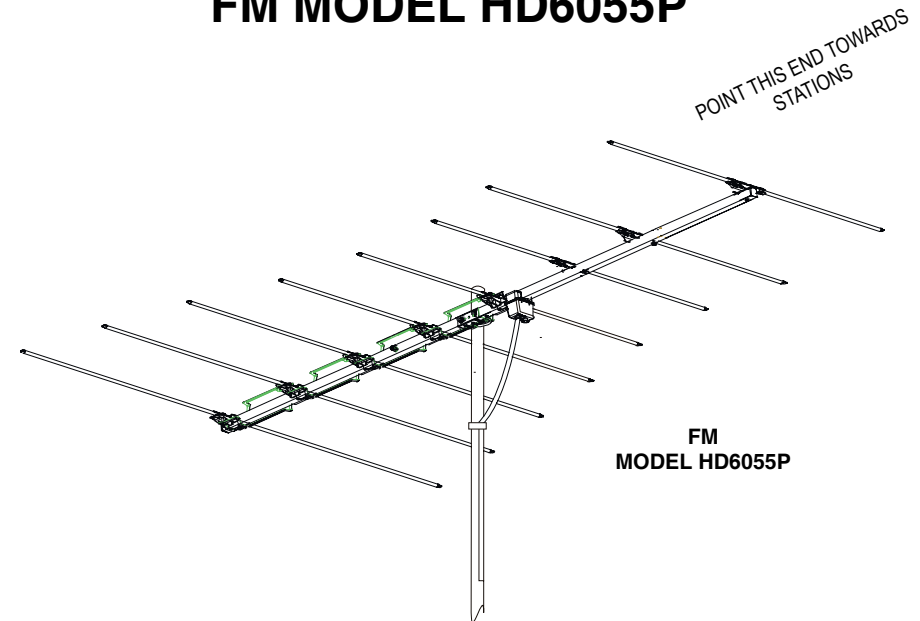

### WARNING

INSTALLATION OF THIS ANTENNA NEAR POWER LINES IS DANGEROUS. FOR YOUR SAFETY, FOLLOW THE INSTALLATION INSTRUCTIONS.


### NOTE

In order to prevent damage in shipment, the second element set of elements from the rear of the boom are folded to the reverse side. You can identify the elements because they are tagged. Follow the directions carefully.

**STEP 1.** Remove antenna from carton and unfold elements, making certain the elements lock tightly into place and are flat and parallel to each other.


**STEP 2.** To attach the cartridge housing to the antenna, align the snaps on the cartridge housing with the snap holes on the cartridge housing receptacle on the antenna and push the housing into the receptacle until it snaps into place. See Figure 1.

**STEP 3.** Slide weather boot over the 75 ohm coaxial cable. Install connector and attach the "downlead" to the connector on cartridge housing. Slide weather boot over connectors and boot collar. See Figure 1.

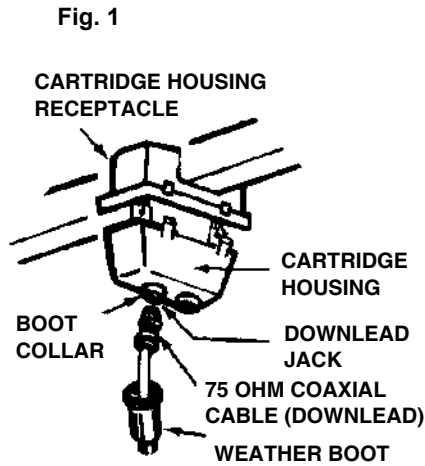

**STEP 4.** Mount antenna on mast, point front (small end) towards stations and tighten mast clamp securely. See Figure 2.

**STEP 5.** The 75 ohm coaxial cable downlead may be secured to the mast by taping or use of plastic wire ties.



## HOW TO PROVIDE LIGHTNING PROTECTION FOR TV ANTENNA AND SET

**Step 1.** Mount the grounding block as close as possible to where the 75 ohm coaxial cable downlead enters the house. See Figure 3.

**Step 2.** The ground wires for both the mast and the downlead should be copper or aluminum wire, number eight (8) or larger. See Figure 3.

**Step 3.** The downlead wire from the antenna to the grounding block and the mast ground wire should be secured to the house spaced from four (4) to six (6) feet apart. See Figure 3.

**NOTE:** In the case of a "ground up" antenna installation, it may not be necessary to ground the mast if the mast extends four or more feet into the earth. Consult a TV serviceman for the proper depth in your location.

**Fig. 3**  
Example of antenna grounding as per National Electrical Code, ANSI/NFPA 70

