

CAT5E UTP OUTDOOR CABLE

CMX UV RATED with Messenger




DESCRIPTION

Category-5E UTP, Outdoor Rated Cable with Messenger, 24AWG Solid-Bare Copper.

FEATURES

- Ideal for Outdoor Aerial Applications
- Galvanized Steel Messenger for Support
- Easily Identified Color-Striped Pairs
- 24AWG Solid Copper Conductors
- Exceeds TIA/EIA-568C.2 Standards
- ETL Listed, RoHS Compliant
- 1000ft Wooden Spool

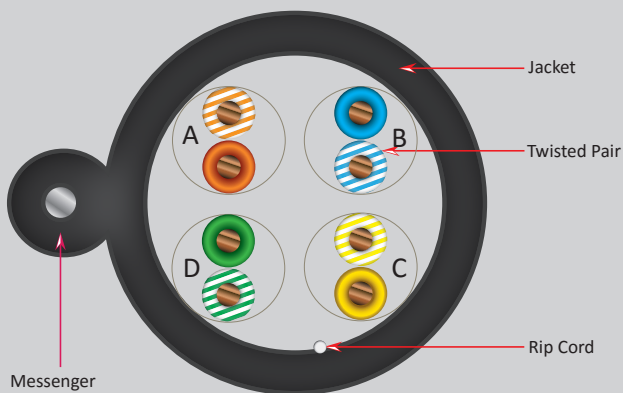

SKU: 059-497/MESG

Technical Data

Rated Temperature	-40~70°C
Rated Voltage	30V
Flammability Test	IEC-332-1

Conductor

Size	Solid Bare Copper
------	-------------------

Insulation

Average Thickness (mm)	0.205
Insulation Diameter (±0.005mm)	0.91
Twisted Pair Diameter (±0.01)	1.92

Assembly Diameter

Messenger

Diameter (mm)	Galvanized Steel
---------------	------------------

Jacket (Black)

Average Thickness (mm)	LLDPE
Outer Diameter (±0.10mm)	0.80x0.65
Rip Cord	5.40x2.60
	Yes (Nylon)

Color of Pairs

Pair 1:Blue,White-Blue
Pair 2:Orange,White-Orange
Pair 3:Green,White-Green
Pair 4:Brown,White-Brown

Mechanical Characteristics

Test Object	Jacket	
Test Material	LLDPE	
Before	Tensile Strength (Mpa)	≥10.6
Aging	Elongation (%)	≥300
Aging Condition (°Cxhrs)		100x168
After	Tensile Strength (Mpa)	≥85% of unaged
Aging	Elongation (%)	≥50% of unaged
Cold Bend (-40±2° Cx4hrs)		No Crack

Marking on Jacket

VERTICAL 4001453 cETLus VERIFIED CMX UTP 4PR 24AWG
OUTDOOR UV CAT5E 350MHz TIA/EIA-568C.2 RoHS XXXFT
(SEQUENTIAL FOOT MARKERS ON JACKET)

Jacket color available in
Black

VERTICAL CABLE

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York



www.verticalcable.com

Rev. 02/2016

Specs subject to change without notice.
It is the sole responsibility of the user to have the most current specs.

CAT5E UTP OUTDOOR CABLE

CMX UV RATED with Messenger

PERFORMANCE

Electrical Characteristics:

1.0-350MHz Impedance (Ohms)	100±15
1.0-350.0MHz Delay Skew (ns/100m)	≤45
Pair-to-Ground Capacitance Unbalance (pF/100m)	≤330
Max. Conductor DC Resistance 20°C (ohms/km)	93.8
Resistance Unbalance (%)	≤5

Frequency (Mhz)	Return Loss (Min dB)	Attenuation Max (dB/100m)	Next (Min dB)
1	20.0	2.0	68.3
4	23.0	4.1	59.3
8	24.5	5.8	54.8
10	25.0	6.5	53.3
16	25.0	8.2	47.3
20	25.0	9.3	45.8
25	24.3	10.4	44.3
31.25	23.6	11.7	45.9
62.5	21.5	17.0	38.4
100	20.1	22.0	33.8
200	18.0	32.4	30.8
300	16.8	41.0	31.2
350	16.3	44.9	30.1

Frequency (Mhz)	PSNext Min (dB)	ELFEXT Min(db/100m)	PSELFEXT Min(db/100m)
1	62.3	63.8	60.8
4	53.3	51.7	48.7
8	48.8	45.7	42.7
10	47.3	43.8	40.8
16	44.3	39.7	36.7
20	42.8	37.7	34.8
25	41.3	35.8	32.8
31.25	39.9	33.9	30.9
62.5	35.4	27.8	24.8
100	32.3	23.8	21.0
200	27.8	17.7	14.7
300	25.2	14.2	11.2
350	24.2	12.9	9.9

VERTICAL CABLE

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York



www.verticalcable.com

Rev. 05/2015

Specs subject to change without notice.
It is the sole responsibility of the user to have the most current specs.